



HSE Gas explosion proof solenoid valve · Exd mb IIC T4 IP67

가스용 방폭 솔레노이드 밸브(2-WAY N/C TYPE) / Certification No. 18-GA2BO-0122X



HYO SHIN ELECTRIC CO., LTD.




▶ 형식(MODEL) 방폭코일 S-TYPE

MODEL NO.	VOLTAGE	Hz	WATTAGE	REMARK
HSA-221460	AC 220V	60Hz	14±10%	STANDARD
HSA-221450	AC 220V	50Hz	14±10%	OPTION
HSA-241450	AC 240V	50Hz	14±10%	OPTION
HSA-111460	AC 110V	60Hz	14±10%	OPTION
HSA-101450	AC 100V	50Hz	14±10%	OPTION
HSD-024140	DC 24V	-	14±10%	STANDARD
HSD-110140	DC 110V	-	14±10%	OPTION
HSD-125140	DC 125V	-	14±10%	OPTION

외형도(DIMENSIONS)

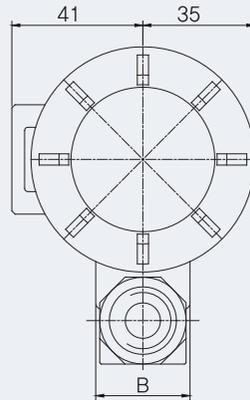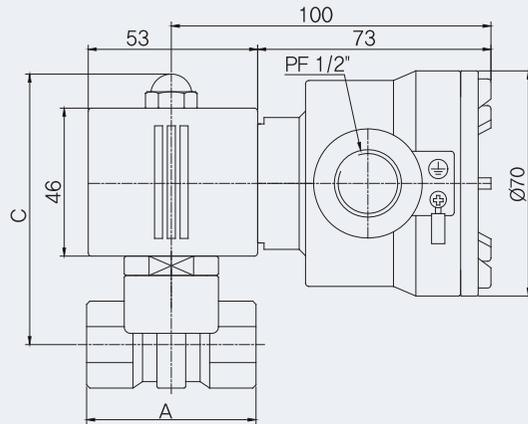

CABLE CONNECTION LINE ▶ 주문시 선택

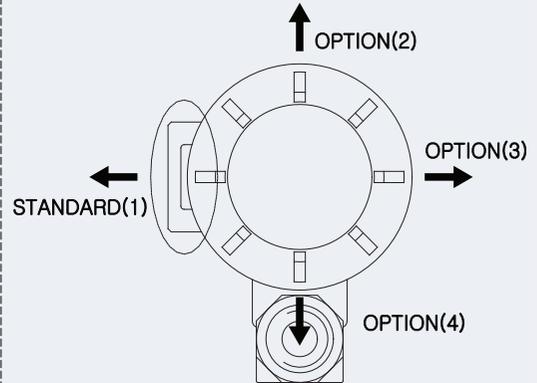

적용품목(APPLICATION MODEL)

MODEL	A	B	C	ORIFICE	PT(Rc) SIZE	PRESSURE(bar)	WEIGHT
HGV 021-EX	42	28	84	Ø2mm	PT(Rc) 1/8"	0 ~ 7	0.94Kg
HGV 032-EX	42	28	84	Ø3mm	PT(Rc) 1/4"	0 ~ 7	0.94Kg
HGV 042-EX	42	28	84	Ø4mm	PT(Rc) 1/4"	0 ~ 7	0.94Kg
HGV 052-EX	42	28	84	Ø5mm	PT(Rc) 1/4"	0 ~ 3	0.94Kg
HGV 053-EX	42	28	84	Ø5mm	PT(Rc) 3/8"	0 ~ 3	0.94Kg
HGV 103-EX	53	29.5	84	Ø10mm	PT(Rc) 3/8"	0 ~ 0.7	1.03Kg
HGV 104-EX	53	29.5	84	Ø10mm	PT(Rc) 1/2"	0 ~ 0.7	1Kg

사양서(SPECIFICATIONS)

구분 (CLASSIFICATION)	표준 사양 (STANDARD)	옵션 사양 (OPTION)	구분 (CLASSIFICATION)	표준 사양 (STANDARD)	옵션 사양 (OPTION)
사용유체 (FLUID)	GAS (가스용)		코일절연 종별 (INSULATION GRADE)	CLASS H	
유체온도범위 (FLUID TEMP.)	SPECIAL FKM 0 ~ 60°C	NBR : 0 ~ 60°C EPDM : 0 ~ 100°C	몸체재질 (BODY MAT'L)	BRASS(황동)	
주위허용온도 (AMBIENT TEMP.)	50°C(MAX)		씨트재질 (SEAT MAT'L)	SPECIAL FKM	• NBR • EPDM

* 기타 사양은 HSE에 문의 요망, 도면치수 및 제품 사양은 품질향상을 위해 변경될 수 있음
CONSULT WITH HSE ABOUT OTHER OPTION SPECIFICATIONS, PRODUCT SPECIFICATION IS TO SUBJECT TO THE QUALITY ENHANCEMENT.